

Mirror Display for More Platform
Plug and Play Wireless Presentation
Multi-screen for More Demonstration



MODEL **MP2**

Support 4 Channels Wireless Display
Support Cross-platform Mirroring
Plug and Play Wireless Presentation
Support 2.5 Million Pixels Customized Resolution
EDID Management
Cascade Split with Multiple Device
Support Two Sending Card Slots

SPROLINK[®]

www.sprolink.com

PRODUCT FEATURE

Up to 4 Channels wireless display

MP2 is a wireless display video processor. Support up to 4 channels wireless presentation, user can freely switching from single window, two windows, three windows, and four windows. Support multiple wireless senders online for multiple laptops. Idea for conference room application.



5GHz Transmission

Support 5GHz with 2.4GHz, compatible for low latency wireless transmission.




Plug and Play Wireless Sender

Wireless sender support plug and play, no extra APP required, sharing your screen as simply as one click.




SYSTEM SOLUTION DIAGRAM

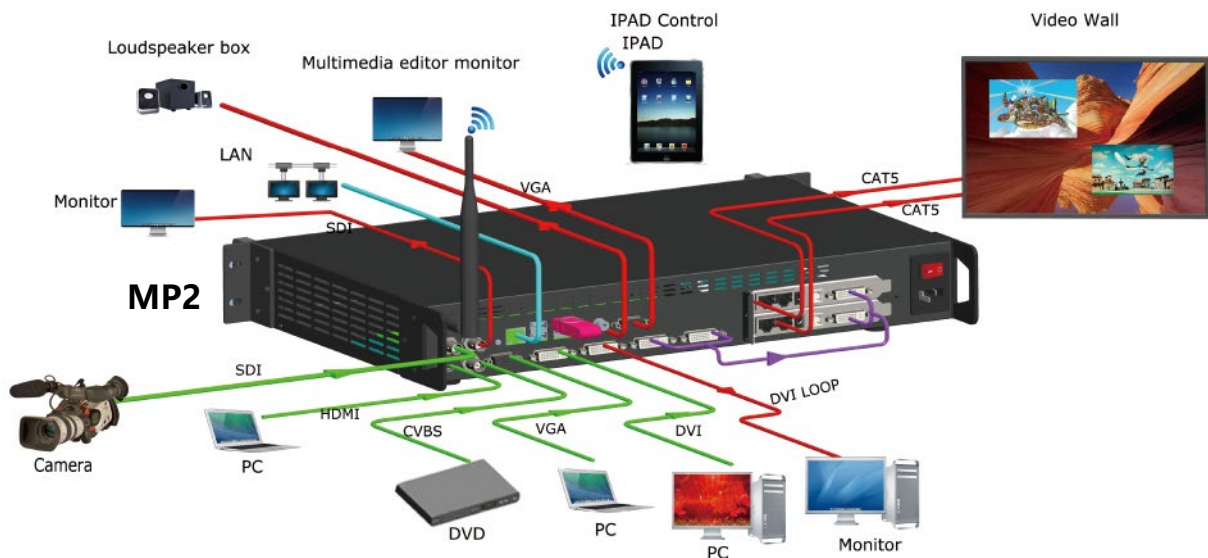


PRODUCT SOLUTIONS


Project 1: Wireless Presentation for Android, iOS platform, no APP required.

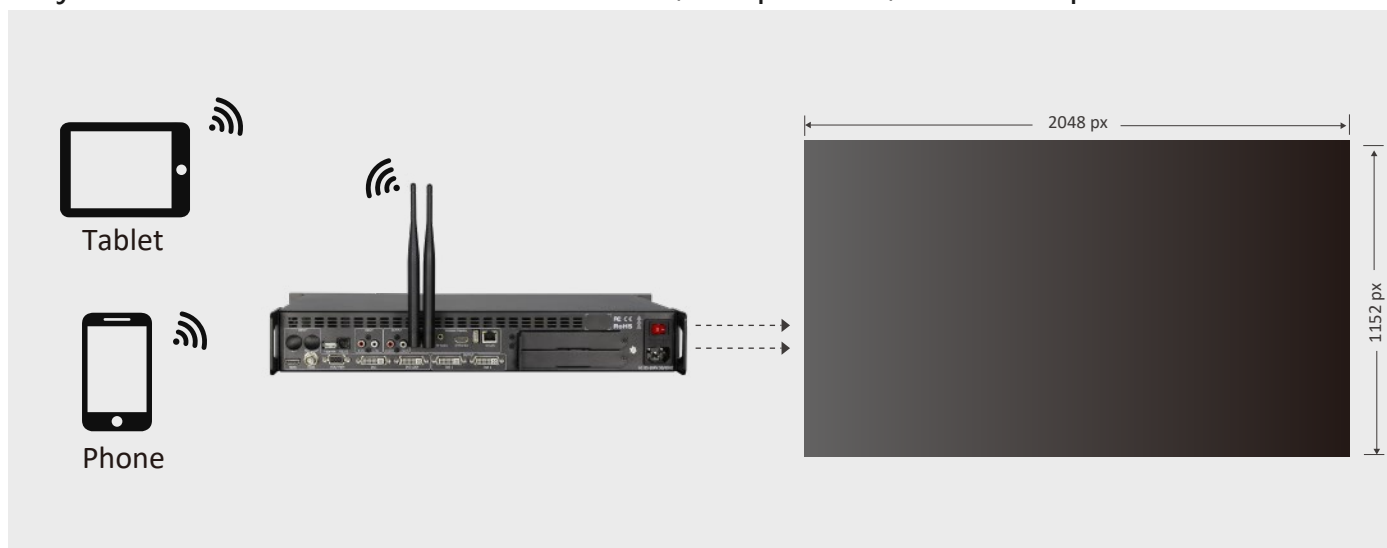

Project 2: Plug and Play, Sharing the Screen as Simple as One Click

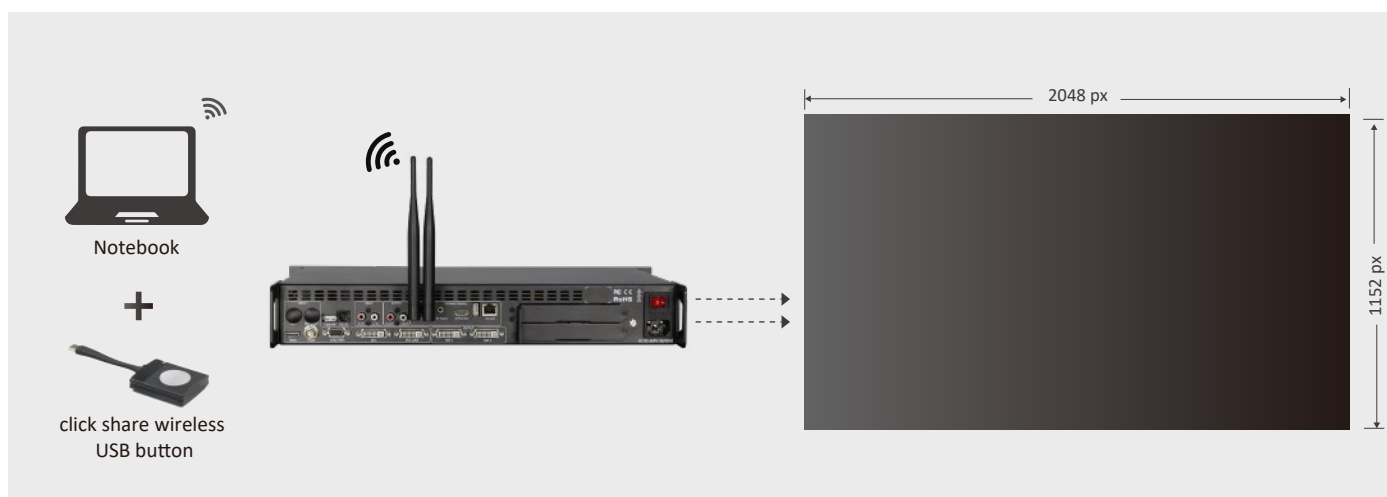

Project 3: Four Windows Simultaneous Display for External Signals and Wireless Mirroring.

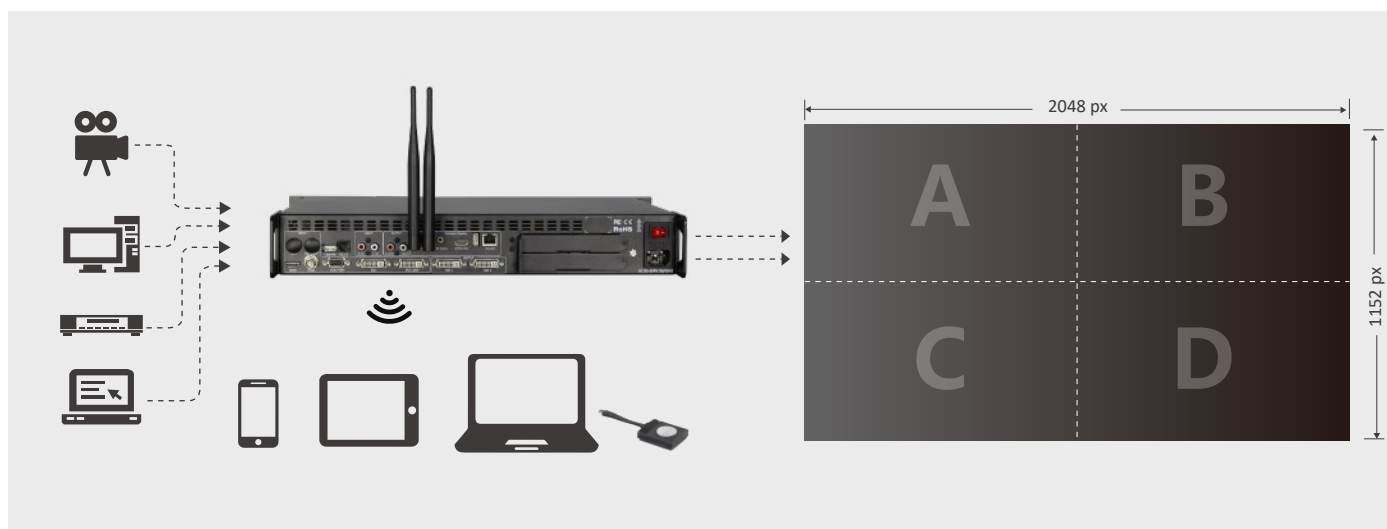



SPECIFICATIONS

Input Interface	Standard	1 × HDMI 1.3 1 × DVI 1 × VGA 1 × CVBS 1 × Wireless Display (4 channels) 2 × RCA (LR Stereo Audio) 2 × WIFI (2.4G, 5G Hz)
	Optional	1 × SDI+SDI LOOP N × Sender
Output Interface	Standard	2 × DVI+1 × DVI LOOP 1 × HDMI (Receiver Output) 2 × RCA (LR Stereo Audio)
Operation	Standard	1 × Sender Keyboard , RS232, Wireless Sender
Input Resolution	DVI	DVI HDMI1.3
	HDMI	SMPTE: 480i 576i 720p 1080i 1080p VESA: 800x600 1024x768 1280x720 1600x1200 1920x1080 1920x1200 2048x1152
	VGA	VESA: 800x600 1024x768 1280x1024 1600x1200 1920x1080 1920x1200 2048x1152
	CVBS	480i 576i PAL NTSC SECAM
	SDI	480i 576i 720p 1080i 1080p 1080psf
Output Resolution	VESA	1024x768 1280x720 1280x1024 1400x1050 1600x1200 1920x1080 1920x1200 2048x1152 2560x816 1024x1280 1152x1152 1280x1280 1536x1536 2560x1024 2560x1600 3840x540
Support Standard	DVI	DVI 1.0
	HDMI	1.3
	VGA	VGA-U
	CVBS	PAL NTSC SECAM
	SDI	SD-SDI、HD-SDI、3G-SDI
	fps	23.98/24/25/29.97/30/50/59.94/60Hz
Input Voltage	AC 100~264V (Typical Value 110/220) 50/60Hz	
Maximum Power	35W	
Temperature	-25°C~55°C (Typical Value 25°C)	
Humidity	20%~90%	
Weight	4.5kg (Equipment Weight) 6.0kg (Transport Weight)	
Dimension	480mm x 320mm x 67mm (Equipment Size) 540mm x 380mm x 140mm (Transport Size)	

PRODUCT CODE

Product Code	Item
P180-MP2-000-01	MP2
P180-MP2-000-02	SDI Input
P180-MP2-000-03	Wireless Sender

